


JAMMA FINGERBOARD TO HEADERS FULL

WWW.ARCANIAC.COM

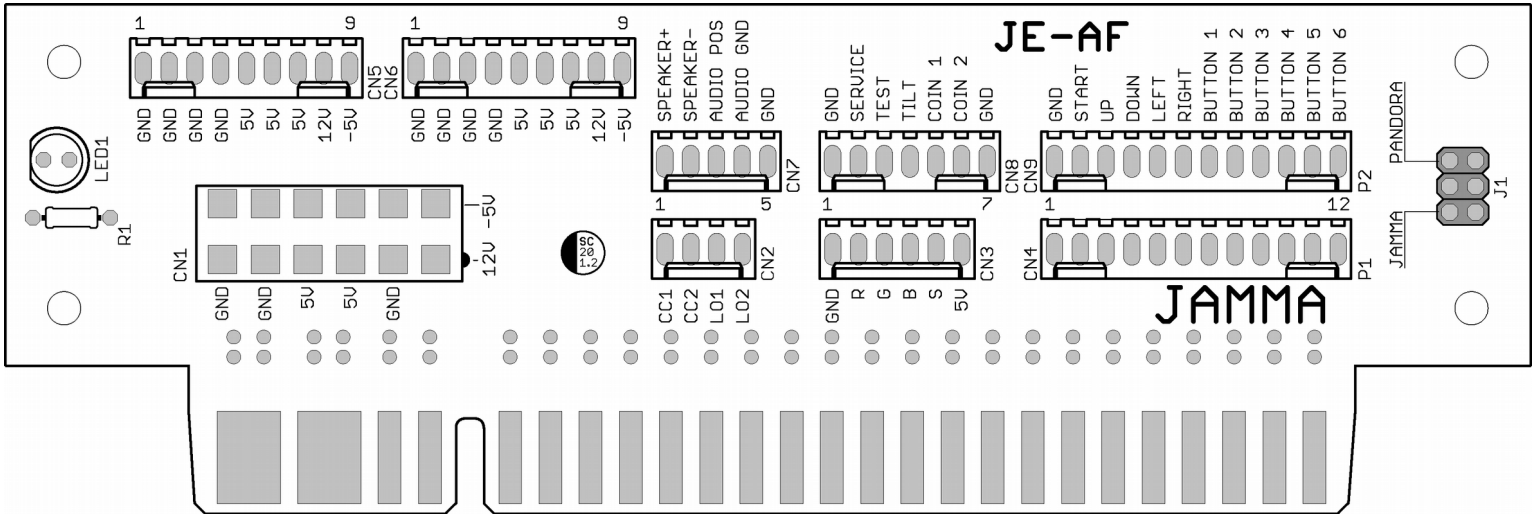

Compatible with 2.54mm (.100") pitch headers. A pin header with 4.20mm (.1654") pitch, 5.50mm (.217") row spacing, can also be used for power.

A 5mm LED can be used to indicate power on.

CN1

12 positions power header.

4.20mm (.1654") pitch, 5.50mm (.217") row spacing.

E.g. :

Molex Mini-Fit Jr. 5566 – Part number: 0039281123 / 0039310120

TE AMP VAL-U-LOK – Part number: 1-2825272-2 / 1-1586037-2

FCI Minitek Pwr 4.2 – Part number: 10127820-1222LF / 10127820-1221LF

CN1 - Pinout					
GND 12	GND 11	+5V 10	+5V 9	GND 8	-5V 7
GND 6	GND 5	+5V 4	+5V 3	GND 2	12V 1

Pin 1 indicator.

J1

With jumpers set to Pandora* a sixth button for each player can be routed to the finger edge, position 27. When set to JAMMA it will act as a ground connection (JAMMA standard).

*Normally used by arcade systems like the Pandora / Blue Elf, other Multi X in 1 systems and custom harnesses.

Dimensions.

