


TAITO CLASSIC TO JAMMA ADAPTER

WWW.ARCANIAC.COM

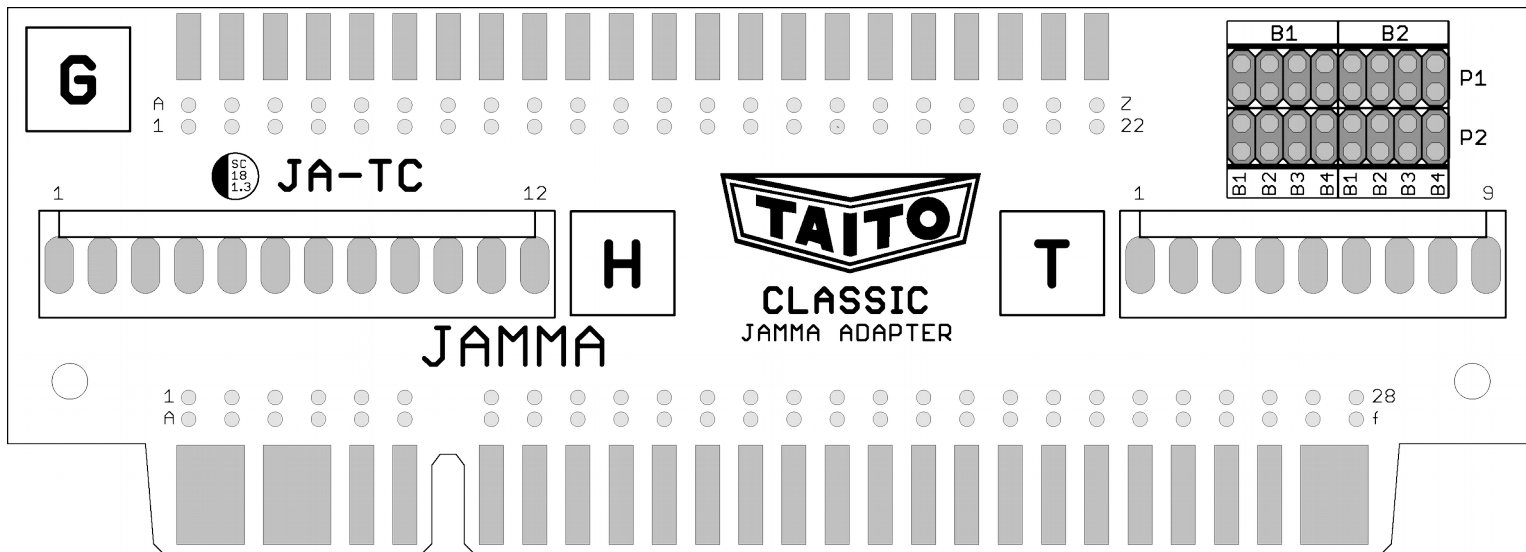

Designed to redirect TAITO Classic game PCB signals to work properly in a JAMMA cabinet or with a Supergun. This adapter features a button remapper.

Button Remapper.

Allows you to easily reconfigure the action buttons to your personal preferences for both players independently.

Compatible games.

Tested on original games only. A bootleg game PCB may use a different pinout.

TAITO CLASSIC

- Alpine Ski
- Bubble Bobble
- Elevator Action
- The Fairyland Story
- Front Line
- Jungle Hunt
- Jungle King
- Kram
- Legend of Kage
- LSA Squad
- Return of the Invaders
- Wild Western

TAITO ARKANOID

- Arkanoid
- Tournament Arkanoid

Pinout.

TAITO CLASSIC Connector G			
Solder Side		Parts Side	
Ground	A	1	Ground
Video Ground	B	2	Video Red
Video Blue	C	3	Video Green
Not Used	D	4	Video Sync
Speaker -	E	5	Speaker +
Key	F	6	Key
Not Used	H	7	Not Used
Coin 2	J	8	Coin 1
Counter 2	K	9	Counter 1
Lockout Coil 2	L	10	Lockout Coil 1
Tilt / Slam Switch	M	11	Service Switch
P2 Start	N	12	P1 Start
P2 Up	P	13	P1 Up
P2 Down	R	14	P1 Down
P2 Right	S	15	P1 Right
P2 Left	T	16	P1 Left
Not Used	U	17	Not Used
Not Used	V	18	Not Used
Not Used	W	19	Not Used
Not Used	X	20	Not Used
P2 Button 1	Y	21	P1 Button 1
P2 Button 2	Z	22	P1 Button 2

TAITO CLASSIC Connector T *			
Solder Side		Parts Side	
Ground	A	1	Ground
Ground	B	2	Ground
Ground	C	3	Ground
Ground	D	4	Ground
Not Used	E	5	Not Used
Not Used	F	6	Not Used
Key	H	7	Key
Not Used	J	8	Not Used
Not Used	K	9	Not Used
Not Used	L	10	Not Used
Not Used	M	11	Not Used
Not Used	N	12	Not Used
Not Used	P	13	Not Used
Not Used	R	14	Not Used
+ 5 Volts	S	15	+ 5 Volts
+ 5 Volts	T	16	+ 5 Volts
+ 5 Volts	U	17	+ 5 Volts
+ 5 Volts	V	18	+ 5 Volts

*Connector T, is an extra power connector used on games that have a two boards stack. It is not required.

TAITO CLASSIC Connector H	
Ground	1
Ground	2
Ground	3
Ground	4
+5 Volts	5
+5 Volts	6
+5 Volts	7
- 5 Volts	8
+12 Volts	9
Key	10
+12 Volts	11
+12 Volts	12